

Environmental Product Declaration



THE INTERNATIONAL EPD® SYSTEM

for Ready Mixed Concrete C35/45, XA3, S4, Gravel

Programme The International EPD® System / www.environdec.com

Programme operator: EPD International AB

EPD registration number: EPD-IES-0032237:001

Publication date: 2026-08-26

Valid until: 2031-08-25





General information

Programme Operator	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	support@environdec.com

Accountabilities for PCR, LCA and third-party verification	
Product Category Rules (PCR)	ISO standard ISO 21930:2017 and CEN standard EN 15804 serve as the Core Product Category Rules (PCR) Product Category Rules (PCR): PCR 2019:14 Construction products (EN 15804:A2); Version 2.0.1; 2025-06-05 c-PCR-003 Concrete and concrete elements (EN 16757); Version 2025-04-08 PCR review was conducted by: The Technical Committee of the International EPD® System. A full list of members is available on www.environdec.com . Review chair: Rob Rouwette (chair), Noa Meron (co-chair). The review panel may be contacted via the Secretariat support@environdec.com .
Life Cycle Assessment (LCA)	LCA accountability: TITAN Cement Company S.A.
Third-party verification	Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: ☒ EPD verification by accredited certification body Third-party verification: Eurocert S.A. is an approved certification body accountable for the third-party verification. The certification body is accredited by: ESYD Accreditation number 21-8
Procedure for follow-up of data during EPD validity involves third party verifier: ☒ Yes ☐ No	
*EPD process certification involves an accredited certification body certifying and periodically auditing the EPD process and conducting external and independent verification of EPDs that are regularly published. More information can be found in the General Programme Instructions on www.envrondec.com .	

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.

For further information about comparability, see EN 15804 and ISO 14025.

Information about EPD owner

Owner of the EPD	Interbeton Building Materials S.A., a member of TITAN Group. 22A Halkidos Str., 11143 Athens, Greece
Contact	Katsakou Martha, Concrete Technology Manager, Titan Greece, T: +30 210 259 1456, E: main@interbeton.gr
Description of the organisation	Building materials manufacturer
Product-related or management system-related certifications	Product group classification: UN CPC 375, ISO standard ISO 21930:2017 and CEN standard EN 15804 serve as the core Product Category Rules (PCR), PCR 2019:14 Construction products (EN 15804:A2); Version 2.0.1; 2025-06-05 c-PCR-003 Concrete and Concrete Elements (EN 16757), Version 2025-04-08, PCR review was conducted by The Technical Committee of the International EPD® System and Independent third-party verification of the declaration and data in accordance with ISO 14025:2006.

Intoduction

Building on more than 120 years of industry experience and driven by its commitment to sustainable growth, TITAN Group has become an international cement and building materials producer, serving customers in more than 25 countries worldwide through a network of 14 integrated cement plants and three cement grinding plants. TITAN also operates quarries, ready-mix plants, terminals, and other production and distribution facilities. We create value by transforming raw materials into products – cement, concrete, aggregates, dry mortars and other building materials. We serve society’s need for safe, durable, resilient, and affordable housing and infrastructure.

Climate change has mobilized organizations, in many sectors, towards a carbon-neutral future. In 2020, the Global Cement and Concrete Association (GCCA) announced its members’ Climate ambition to drive down the CO₂ footprint of operations and products and deliver carbon-neutral concrete to society by 2050. Meanwhile, there is a growing need for enhanced transparency of environmental performance of building materials, such as greenhouse gas (GHG) emissions. Cement is the key ingredient in manufacturing concrete, the second most

used commodity in the world and among the major contributors to the embodied GHG of buildings and infrastructure works.

TITAN is working across the built environment value chain to deliver a carbon-neutral future in a circular economy, life cycle context. Aiming for a 35% reduction of the net direct specific CO₂ emissions by 2030 (compared to 1990 levels), TITAN has defined a road map for developing lowcarbon cementitious products and collaborating in carbon capture R&D projects at the cement plants. The publication of the ready-mixed concrete Environmental Product Declaration (EPD) is an important milestone in the road map, helping to communicate to customers the environmental performance of INTERBETON concretes.


Cement, concrete and other building materials EPDs will help shape the way the construction industry analyses the environmental impact of buildings and infrastructure works, now and in the future. Our EPDs will also provide a rigorous, science-based framework for driving environmental improvement throughout TITAN’s and INTERBETON’s sites and supply chain, offering at the same time an advantage to customers wanting to be leaders in the sustainable infrastructure and building industry.

Geographical Scope: National (Greece)

This EPD concerns exclusively the plants: Koropi and Paiania

All of INTERBETON’s ready-mix concrete production plants in Greece are available at <https://interbeton.gr/who-are/our-presence/>

- 1 METAMORFOSI, Attiki
- 2 KOROPi, Attiki
- 3 PAIANIA, Attiki
- 4 MALAKASA, Attiki
- 5 MANDRA, Attiki
- 6 HELLINIKO, Attiki
- 7 THERMI, Thessaloniki
- 8 NEOCHOROU DA, Thessaloniki
- 9 RAIDESTOS, Thessaloniki
- 10 NEA EFKARPIA, Thessaloniki
- 11 FLOGITA, Chalkidiki
- 12 KASSANDRINO, Chalkidiki
- 13 LAKKOMA, Chalkidiki
- 14 VOLOS-OBRIA, Magnisia
- 15 LAMIA, Fthiotida
- 16 KORINTHOS, Korinthia
- 17 XYLOKASTRO, Korinthia
- 18 THERIANO, Achaia
- 19 KALITHEA, Achaia
- 20 DREPANO, Achaia
- 21 AMALIADA, Hleia
- 22 PYRGOS, Hleia
- 23 KALAMATA, Messinia
- 24 BIPE IOANNINON, Ioannina
- 25 KOSKINOI, Rodos
- 26 GENNADI, Rodos
- 27 ANTIMACHIA, Kos
- 28 MESSARIA, Kos
- 29 BIPE HERAKLION, Heraklion
- 30 ZOFOROI, Heraklion
- 31 LATZIMAS, Rethymno

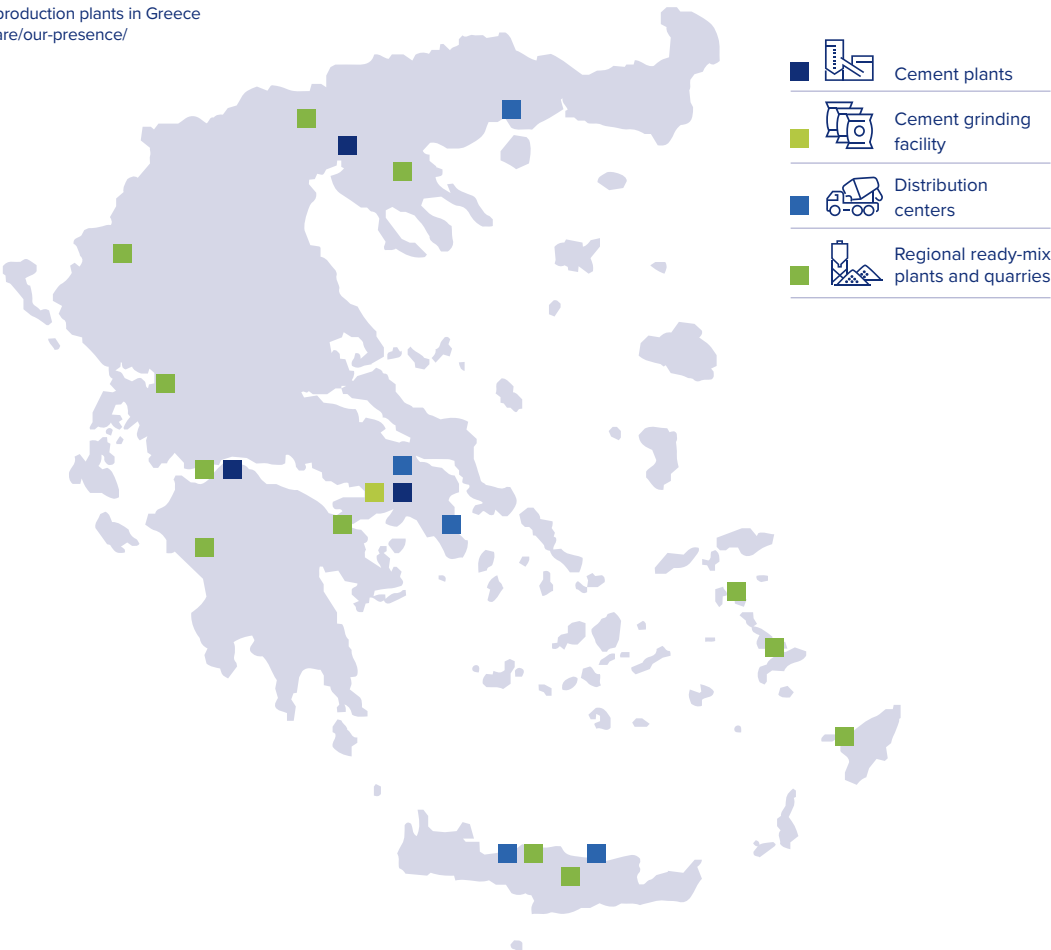

3 Cement plants

1 Cement Grinding Facility

31 Ready-mix Plants

28 Quarries

1 Dry mortar Plant

1 Processed Engineered Fuel Facility

1 Waste Management Facility

Product information

Product name:

35A34G10C0411 - C35/45, XA3, S4, Gravel

Product identification:

Compressive Strength 28 days (MPa): 45

Product description:

Concrete is a material formed by mixing cement, coarse and fine aggregate and water, with or without the incorporation of admixtures and additions. Fresh concrete is manufactured at ready-mix batch plants and is delivered to the construction sites in a liquid state. Fresh concrete is placed, compacted and hardened in the desired shape, via a chemical reaction: the hydration of cement. The cement is the binding agent in concrete: it is a finely ground powder that when hydrated forms

a paste that sets, hardens, and adheres to other materials and after hardening retains its strength even underwater. It is used as the main raw material in the production of concrete, mortar, grouts and plasters.

This is an average EPD for the declared products which comply with the requirements of ELOT EN 206 and the Concrete Technology Regulation KTS 2016. These specific concrete mix designs are produced nationwide by Interbeton Building Materials S.A.

These specific types of concrete have a wide range of applications and are mainly utilized in civil engineering works and in residential and commercial construction.

The product is delivered in bulk with ready-mix trucks.

The technical characteristics and composition of the product are shown in the table below. Product declarations and certificates can be found on the company's website www.interbeton.gr



Technical characteristics according to ELOT EN 206 and the Concrete Technology Regulation KTS 2016

Mechanical properties	Characteristic Compressive Strength f_{ck} , cube (Mpa)	45
Product Density	Kg/m ³	2,343

UN CPC code: 375

Content declaration

Product components	Weight (%)	Biogenic material, mass-% of product	Biogenic material, Kg C/ product or declared unit
Cement	18.0-19.0%	0	0
Coarse Aggregate	25.0-28.0%	0	0
Fine Aggregate	45.0-48.0%	0	0
Water	7.5-8.5%	0	0
Admixtures	0.30-0.40%	0	0
Total	2,347	0	0

Products do not contain any REACH SVHC substances in amounts greater than 0,1%.

The product is delivered in bulk; therefore, no packaging mass is declared.

LCA information

Functional unit / declared unit: The declared unit is one (1) cubic meter (m³).

Reference service life: 50 years.

Production Process: Interbeton manufactures ready-mixed concrete in state-of-the-art facilities in Greece. The production process is fully automated to ensure superior quality products, conforming to the national and European concrete standards. The raw materials (cement, aggregates, water, admixtures etc.) are accurately weighed according to the proprietary Interbeton mix designs to produce ready-mixed concrete with specific characteristics (strength, durability, finishability, pumpability etc.). Once manufactured, the fresh concrete is transported with concrete trucks to the construction sites. The production process is exactly the same at every Interbeton production facility.

Time representativeness: The data used in this study cover from January 2025 to December 2025.

Database(s) and LCA software used: GCCA Industry EPD Tool for Cement and Concrete and Ecoinvent database (v.3.10).

Goal and scope: This EPD evaluates the environmental impacts of one cubic meter of concrete from Cradle to grave, and module D (A+B+C+D).

Data quality: ISO 14044 was applied in terms of data collection and quality requirements. The data concerning the modules A1 (raw material supply), A2 (transportation) and A3 (product manufacturing) were provided by Interbeton Building Materials S.A., incorporating cement EPD data for Titan Cement Company S.A. and involved all input and output materials to each ready-mix plant, the consumed utilities (energy and the distances and means of transport for each input stream. Regarding electricity mix, the latest (2024) national residual electricity mix as published in DAPEEP SA, were utilized (<https://www.dapeep.gr/viosimi-anaptixi/energeiakomeigma/>). The background data for the module A1 e.g. raw materials (amount used by type) as well energy consumption, waste production and transport distances of raw materials and aggregates from cement plants, quarries have been obtained from the company's ERP system and correspond the exact and accurate mix designs for each ready-mix plant. Core indicators for every cement type / cement sourcing plant are obtained from the TITAN CEMENT S.A. publicly available cement EPDs.

The GCCA Environmental Product Declaration tool (v5.2). GCCA's Industry EPD Tool for Cement and Concrete is a web-based calculation tool for EPDs of clinker, cement, concrete, mortars and precast elements, available in both International and North American versions. The present report refers to the International version only.

The latter complies with the latest cement and concrete PCRs registered at the International EPD® System (Environdec), namely c-PCR-001 Cement and building limes (EN 16908) for cement and c-PCR003 Concrete and concrete elements (EN 16757) for concrete and precast elements, both registered as complementary PCRs of PCR 2019:14 Construction products (EN 15804+A2).

The GCCA EPD tool (v5.2) is developed by Quantis <https://quantis-intl.com/> and verified by Studio Fieschi <http://www.studiofieschi.it/en>. The International EPD® System, which provides the framework to develop and publish EPDs based on ISO 14025 and EN 15804, gives the final approval of the tool's compliance with the rules. The underpinning database for the GCCA EPD tool is the version of the Ecoinvent database (v.3.10) and cement manufacturing data obtained through the GNR process (<https://gccassociation.org/sustainabilityinnovation/gnr-gcca-in-numbers/>).

The database of Ecoinvent v.3.10 was used to complete any missing data. Generic data used in this study concerning:

- CO₂ emission factors for different transportation way
- CO₂ emission factors for plant diesel and raw materials
- Specific emission factor of used energy mix (kg CO₂/kWh)
- The energy source behind electricity is GWP-GHG=6,14E-01 kg CO₂ eq./kWh
- CO₂ emission factors for conventional transport to the construction site (ready mix truck)
- CO₂ emission factors for energy and fuels used during construction

- Water and waste-water usage during construction
- Recarbonation during use (B)
- Fuels, emissions and recarbonation during end of life (C) (demolition, transport, waste processing and disposal)
- Recarbonation and emissions for Benefits and Loads (D).

There is no missing data for this concrete mix, since all the required raw data were provided from the ERP system (SAP) that company uses. Data collection and processing for EPD and LCA development is performed according to INTERBETON quality systems.

Geographical scope: National (Greece)

Allocations: The allocation is performed according to the PCR. As no co-products are produced, the flow of materials and energy and the associated release of substances and energy into the environment is related exclusively to the concrete produced. No by-products occur during ready mix concrete production; therefore, there is no need for allocations in by-products.

The study does not include the followings:

- Capital equipment production
- Equipment maintenance
- Human labour and employee transport

Assumptions: This EPD Process is certified using GCCA international modelling of energy use and environmental impact to obtain a suitable estimation for products manufactured.

Pre-defined cement and clinker data provided by the GCCA tool are used for TITAN cements manufactured at Kamari, Patras and Thessaloniki cement plants.


- All modelling assumptions adopted from the GCCA Tool.
- Raw material (inbound) transport distances are generated from ERP data and are accurate across operations.
- For generic EPDs, travel from concrete production site to customer site is calculated at 10 km, the average travel distance across operations.
- Concrete mixes are assumed to use an equal amount of site fuel and energy and responsible for an equal amount of waste flows from A to D.
- The calculation of the bill of materials for every plant is based on ERP data. The concrete mix design (materials percentage participation) was defined by the pre-verified and automated ERP system (SAP) that company uses.
- Water usage in batching operations is, per mix design.

Regarding road transportation, a ready-mix truck with a 9 m³ concrete capacity, EURO4, was used. The representative plant is defined via systematic methodologies, well described and documented within the relevant LCA content, taking into consideration material sourcing, sales volumes and geographic specificity.

Cut-off rules: The cut-off rule for insufficient data or data gaps that are less than 1% of the total input mass or mass per module was applied. In case of insufficient input data or data gaps for a unit process, the cut-off criteria was defined as 1% of renewable and non-renewable primary energy usage and 1% of the total mass input of that unit process. The total of neglected input flows for the stages 'cradle through gate' were calculated to be less than 5% of energy usage and mass." (EN 15804:2012+A2:2019). Regarding the LCA model, the default cut-off criteria are applied for all processes from the Ecoinvent database. In addition, all custom processes developed for the specific purposes of the project are consistent with the rules and guidelines of the Ecoinvent database, and hence the same cut-off criteria are applied.

Comparability: EPD performance for construction products that they do not comply with EN 15804 may not be comparable. EPDs from separate programs but within the same product category may not be comparable as well.

Description of system boundaries: The scope of this study is "Cradle to grave" covering A1-A5, B1-B7, C1-C4 and D.

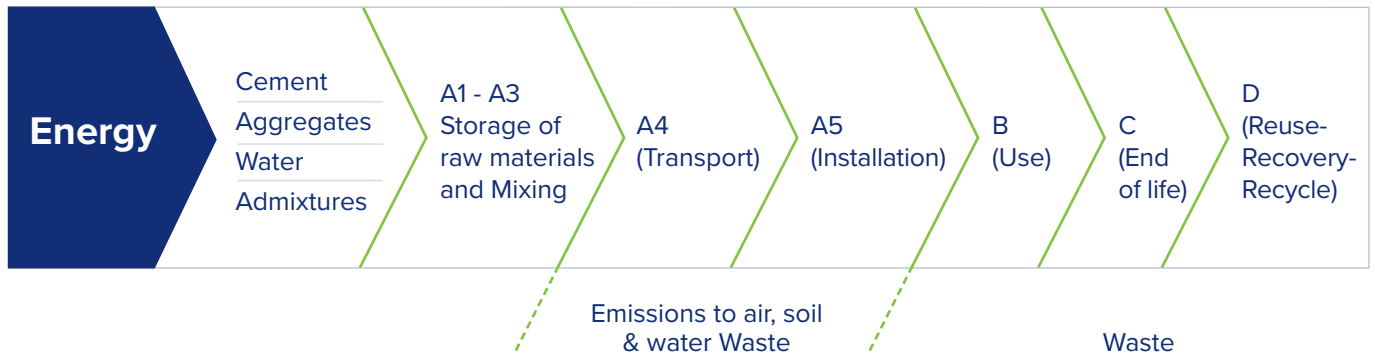

System diagram

The scope of this study is Cradle to grave, A1-A5, B1-B7, C1-C4 and D.

	Product stage			Construction process stage		Use stage							End-of-life stage				Resource recovery stage
	Raw Materials Supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction and demolition	Transport	Waste processing for reuse, recovery and/or recycling	Disposal	Reuse-Recovery-Recycling potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR	GR
Share of primary data	99.93%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - products	Not relevant			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - sites	< 10%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
	A1-A3			A4-A5		B1-B7							C1-C4				D

X = included, MND = module not declared.

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Production of cement	Collected data, Database	EPD owner, Ecoinvent v.3.10	2023	Primary data, Secondary data	88.41%
Production of other raw materials (aggregates, admixtures)	Database	Ecoinvent v.3.10	2025	Primary data	6.63%
Transport of raw materials to manufacturing sites	Database	Ecoinvent v.3.10	2025	Primary data	4.29%
Generation of electricity used in manufacturing of product	Database	Ecoinvent v.3.10	2024	Primary data	0.60%
Total share of primary data, of GWP-GHG results for A1-A3					99.93%

* Note: The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

- **A1-A3 Product stage**

- A1 Raw materials supply: this module takes into account the extraction and processing of raw materials and the associated energy that is produced prior to manufacturing concrete.
- A2 Transport: this module includes the transport of the different raw materials from the supplier to the ready-mix plant.
- A3 Manufacturing: this module includes the consumption of energy and water during the concrete manufacturing process, as well as the transport and management of the factory-produced waste. The manufacture of concrete or mortar consists mainly of a mixing process of different components.

- **A4-A5 Construction process**

- A4 Transport

PARAMETERS FOR A4 - TRANSPORT	
PARAMETER	VALUE / DESCRIPTION
Fuel type and consumption of vehicle used for transport, e.g. ready-mix truck, aggregates or cement truck, vessel etc.	Truck of 32 tn. Fuel consumption according to GCCA model
Distance (Delivery/ready-mix truck)	Ready-mix truck, 10 Km (declared average)
Capacity Utilization (including empty returns)	100%
Bulk density of transported concrete	Expressed in LCA information section
Volume capacity utilization factor	99%

- A5 Construction/Installation The product is directly transferred from the truck to the construction site

PARAMETERS FOR A5 - CONSTRUCTION / INSTALLATION	
PARAMETER	VALUE / DESCRIPTION
Auxiliary materials for installation	No auxiliary material used
Use of water	669 lt/m ³
Use of waste\water	0,669 lt/m ³
Use of other resources	No other resource consumption
Quantitative description of the energy (regional mix) and the consumption during the installation	Electricity: 2.776 Kwh/m ³
Quantitative description of diesel and the consumption during the installation	Diesel: 1.669 lt/m ³
Wastage of materials at job site before waste processing, generated by the product's installation	Product losses 1%

- B Use stage: the product's fix CO₂, by carbonatation during the use phase (B1), and do not require maintenance (B2), repair (B3), replacement (B4), refurbishment (B5), operational energy use (B6) or operational water use (B7) during its Reference Service Life. CO₂ by carbonatation of cement during the use phase has been included as required in c-PCR, following the methodology explained in EN 16757.
- C End of life stage
 - C1 Deconstruction/demolition: the use of diesel during the demolition process has been included.
 - C2 Transport to waste processing: the model use for the transportation (see A4, transportation to the building site) is applied.
 - C3 Waste processing for reuse, recovery and/or recycling: the product is 50% recycled.
 - C4 Disposal: the product is 50% landfilled.

PARAMETERS FOR C End of life	
PARAMETER	VALUE / DESCRIPTION
Collection process specified by type	The product is collected mixed with construction waste
Recovery system specified by type	50% recycled
Disposal specified by type	50% landfilled
Assumptions for scenario development (e.g. transportation)	16-32 tn truck, Fuel consumption according to GCCA model
Diesel in building/demolition equipment	2.674 lt / m ³
Transport distances (truck)	31.5 km

Disclaimer: Considering that Module C is included in this EPD, is discouraged to use the results of modules A1-A3 (A1-A5 for services) without considering the results of module C.

- D Reuse-Recovery-Recycling potential the product is recycled in 50% . As a consequence, the module D has been calculated where the results of recycled content that the product already includes has been taken into account. The avoided product is considered crushed aggregate.

PRODUCT DATA SOURCES					
In Accordance with Environdec c-PCR-003 Concrete, concrete elements (EN I 16757), ISO 14025 and EN15804:A2					
LCA Stage	Input/output	Sub Process	Data Source	Temporal Scope	Quality
Product Description	Product description and specific density		INTERBETON ERP report Bill of Materials (BoM) and material specific data	January 2025 to December 2025	High
A1	Raw Materials	Background modeling data	INTERBETON internal Quality Assurance database, ERP systems	January 2025 to December 2025	High
A2	Cement and Aggregate Transport	Background modeling data	Actual transport distances - ERP invoices to haulers. Sea transport based on port-to-port distances	2025	High
A3	Concrete Batching	Electricity	Provider Invoices	2025	High
		Diesel	Supplier Invoices	2025	High
		Water	Utility Invoices	2025	High
		Electricity sources	As published in DAPEEP SA	2024	High
	Waste	Background Data	Invoices for waste transportation	January 2025 to December 2025	Medium
A4-A5 Construction	Outbound travel distance	Background modeling data	Average distances to construction sites	January 2025 to December 2025	High
B Use	Re-carbonation*	Modeling data	Default GCCA Quantis tool settings	N/A	Proxy-Medium
C1. End of Life Demolition	Demolition		Default GCCA Quantis tool settings	N/A	Proxy-Medium
C2. End of Life Transport	Transport		Default GCCA Quantis tool settings	N/A	Proxy-Medium
C3. End of Life Waste Processing	Recycling Rate at End of life		Default GCCA Quantis tool settings	N/A	Proxy-Medium
C4. End of Life Disposal	Disposal Rate at End of life		Default GCCA Quantis tool settings	N/A	Proxy-Medium
D. Benefits and Loads			Default GCCA Quantis tool settings	N/A	N/A
GENERAL	General	General	Ecoinvent database	As updated	Secondary, High

* Regarding recarbonation benefits the scenario are 10m² free surface per m³ of concrete and 50 years of Reference Life Cycle.

Environmental performance

The following tables contain the environmental indicators for the following plants: Koropi and Paiania.

All ready-mix plants have lower than ±10% differences between the environmental indicators for the product mix designs described in the EPD. They are presented in the same EPD using the impacts of an environmentally representative plant. The following environmental information are for the representative plant and its associated mix design, based on criteria of 1) Importance and relevance of the cement supplying plant and 2) Relevance of raw material transport. No allocation was needed.

For construction services, the total value of A1-A3 shall be replaced with the total value of A1-A5.

The EN 15804 reference package based on EF 3.1 has been used.

C35/45, XA3, S4, Gravel

Core environmental impact indicators																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-tot	kg CO ₂ eq.	2,34E+02	2,30E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	9,69E+00	-8,83E+00	-8,47E+00
GWP-GHG ³	kg CO ₂ eq.	2,34E+02	2,44E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	9,67E+00	-8,83E+00	-8,44E+00
GWP-fos	kg CO ₂ eq.	2,34E+02	2,43E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	9,67E+00	-8,83E+00	-8,44E+00
GWP-bio	kg CO ₂ eq.	1,40E-01	-1,40E-01	-2,00E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,00E-02	0,00E+00	-2,10E-02
GWP-luc	kg CO ₂ eq.	3,64E-02	1,02E-03	2,88E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,54E-04	1,45E-02	5,07E-03	5,87E-05	-6,67E-03
ODP	kg CFC ₁₁ eq.	1,93E-06	3,91E-08	2,18E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,33E-07	5,12E-07	2,03E-07	1,03E-08	-6,88E-08
AP	mol H ⁺ eq.	5,92E-01	6,21E-03	7,51E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,83E-02	1,22E-01	6,87E-02	6,10E-03	-5,34E-02
EP-fw ¹	kg P eq.	3,76E-03	6,43E-05	3,41E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,27E-05	9,38E-04	4,86E-04	0,00E+00	-7,63E-04
EP-mar	kg N eq.	8,28E-02	1,57E-03	2,91E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,63E-02	3,96E-02	2,09E-02	2,83E-03	-1,27E-02
EP-ter	mol N eq.	1,94E+00	1,70E-02	3,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,98E-01	4,31E-01	2,17E-01	3,10E-02	-1,60E-01
POCP	kg NMVOC _{eq}	5,65E-01	9,39E-03	9,69E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,19E-01	1,70E-01	6,78E-02	9,24E-03	-4,34E-02
ADPE ²	kg Sb _{eq}	7,82E-04	7,05E-06	2,67E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,19E-06	1,20E-04	4,48E-05	2,48E-07	-4,48E-05
ADPF ²	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	1,45E+02	8,84E+00	-1,01E+02
WDP ²	m ³ eq.	1,88E+01	1,76E-01	9,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,78E-01	2,31E+00	1,61E+00	2,17E-02	-1,70E+01

GWP-GHG = Global Warming Potential GHG; GHG **GWP-total** = Global Warming Potential total; **GWP-fossil** = Global Warming Potential fossil fuels; **GWP-biogenic** = Global Warming Potential biogenic; **GWP-luluc** = Global Warming Potential land use and land use change; **ODP** = Depletion potential of the stratospheric ozone layer; **AP** = Acidification potential, Accumulated Exceedance; **EP-freshwater** = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-marine** = Eutrophication potential, fraction of nutrients reaching marine end compartment; **EP-terrestrial** = Eutrophication potential, Accumulated Exceedance; **POCP** = Formation potential of tropospheric ozone; **ADP-minerals&metals** = Abiotic depletion potential for non-fossil resources; **ADP-fossil** = Abiotic depletion for fossil resources potential; **WDP** = Water (user) deprivation potential, deprivation-weighted water consumption

¹ Eutrophication aquatic freshwater shall be given in both kg PO₄⁻³ eq and kg P eq.

² The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

³ The indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013).

Use of resources																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	9,56E+01	4,81E-01	7,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-01	6,75E+00	1,19E+01	5,43E-02	-8,39E+00
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	9,56E+01	4,81E-01	7,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-01	6,75E+00	1,19E+01	5,43E-02	-8,39E+00
PENRE	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	1,45E+02	8,84E+00	-1,01E+02
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	1,45E+02	8,84E+00	-1,01E+02
SM	kg	4,99E+01	0,00E+00	4,99E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	1,02E+02	0,00E+00	1,02E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,93E+02	0,00E+00	1,93E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NFW	m ³	2,23E+00	5,39E-03	3,69E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,38E-03	6,65E-02	4,41E-02	5,75E-04	-4,01E-01

Acronyms: **PERE** = use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM** = use of renewable primary energy resources used as raw materials; **PERT** = total use of renewable primary energy resources; **PENRE** = use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM** = use of non-renewable primary energy resources used as raw materials; **PENRT** = total use of non-renewable primary energy resources; **SM** = use of secondary material; **RSF** = use of renewable secondary fuels; **NRSF** = use of non-renewable secondary fuels; **NFW** = net use of fresh water

Other environmental information describing waste categories																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NHWD	kg	0,00E+00	0,00E+00	1,17E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,17E+03	0,00E+00
RWD	kg	4,62E-02	7,90E-06	6,22E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,25E-05	1,04E-04	1,31E-04	9,72E-07	-1,77E-04

Acronyms: **HWD** = Hazardous waste disposed; **NHWD** = Non-hazardous waste disposed; **RWD** = Radioactive waste disposed

Outputs																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	3,37E-01	0,00E+00	1,17E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,17E+03	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Acronyms: **CRU** = Components for re-use; **MR** = Materials for recycling; **MER** = Materials for energy recovery; **EEE** = Exported electrical energy; **EET** = Exported thermal energy

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Additional LCA results

In accordance with PCR 2019:14 v.2.01, Section 4.8.4, if the declared end-of-life scenario is a mix of alternatives, the corresponding 100% scenarios shall also be declared. Therefore, two scenarios for 100% recycling (Scenario 1) and 100% landfill (Scenario 2) are considered in this EPD.

Scenario 1:

100% Recycling of product at end-of-life

Core environmental impact indicators																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-tot	kg CO ₂ eq.	2,34E+02	2,30E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	1,22E+01	0,00E+00	-1,69E+01
GWP-GHG ³	kg CO ₂ eq.	2,34E+02	2,44E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	1,21E+01	0,00E+00	-1,69E+01
GWP-fos	kg CO ₂ eq.	2,34E+02	2,43E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	1,21E+01	0,00E+00	-1,69E+01
GWP-bio	kg CO ₂ eq.	1,40E-01	-1,40E-01	-2,00E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,00E-02	0,00E+00	-4,20E-02
GWP-luc	kg CO ₂ eq.	3,64E-02	1,02E-03	2,88E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,54E-04	1,45E-02	9,47E-03	0,00E+00	-1,33E-02
ODP	kg CFC ₁₁ eq.	1,93E-06	3,91E-08	2,18E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,33E-07	5,12E-07	2,30E-07	0,00E+00	-1,38E-07
AP	mol H ⁺ eq.	5,92E-01	6,21E-03	7,51E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,83E-02	1,22E-01	8,85E-02	0,00E+00	-1,07E-01
EP-fw ¹	kg P eq.	3,76E-03	6,43E-05	3,41E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,27E-05	9,38E-04	9,71E-04	0,00E+00	-1,53E-03
EP-mar	kg N eq.	8,28E-02	1,57E-03	2,91E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,63E-02	3,96E-02	2,55E-02	0,00E+00	-2,53E-02
EP-ter	mol N eq.	1,94E+00	1,70E-02	3,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,98E-01	4,31E-01	2,64E-01	0,00E+00	-3,21E-01
POCP	kg NMVOC _{eq}	5,65E-01	9,39E-03	9,69E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,19E-01	1,70E-01	8,20E-02	0,00E+00	-8,68E-02
ADPE ²	kg Sb _{eq}	7,82E-04	7,05E-06	2,67E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,19E-06	1,20E-04	6,36E-05	0,00E+00	-8,96E-05
ADPF ²	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	1,92E+02	0,00E+00	-2,02E+02
WDP ²	m ³ eq.	1,88E+01	1,76E-01	9,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,78E-01	2,31E+00	2,35E+00	0,00E+00	-3,40E+01

GWP-GHG = Global Warming Potential GHG; GHG **GWP-total** = Global Warming Potential total; **GWP-fossil** = Global Warming Potential fossil fuels; **GWP-biogenic** = Global Warming Potential biogenic; **GWP-luc** = Global Warming Potential land use and land use change; **ODP** = Depletion potential of the stratospheric ozone layer; **AP** = Acidification potential, Accumulated Exceedance; **EP-freshwater** = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-marine** = Eutrophication potential, fraction of nutrients reaching marine end compartment; **EP-terrestrial** = Eutrophication potential, Accumulated Exceedance; **POCP** = Formation potential of tropospheric ozone; **ADP-minerals&metals** = Abiotic depletion potential for non-fossil resources; **ADP-fossil** = Abiotic depletion for fossil resources potential; **WDP** = Water (user) deprivation potential, deprivation-weighted water consumption

¹ Eutrophication aquatic freshwater shall be given in both kg PO₄⁻³ eq and kg P eq.

² The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

³ The indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013).

Use of resources																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	9,56E+01	4,81E-01	7,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-01	6,75E+00	1,78E+01	0,00E+00	-1,68E+01
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	9,56E+01	4,81E-01	7,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-01	6,75E+00	1,78E+01	0,00E+00	-1,68E+01
PENRE	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	1,92E+02	0,00E+00	-2,02E+02
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	1,92E+02	0,00E+00	-2,02E+02
SM	kg	4,99E+01	0,00E+00	4,99E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	1,02E+02	0,00E+00	1,02E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,93E+02	0,00E+00	1,93E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NFW	m ³	2,23E+00	5,39E-03	3,69E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,38E-03	6,65E-02	6,51E-02	0,00E+00	-8,02E-01

Acronyms: **PERE** = use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM** = use of renewable primary energy resources used as raw materials; **PERT** = total use of renewable primary energy resources; **PENRE** = use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM** = use of non-renewable primary energy resources used as raw materials; **PENRT** = total use of non-renewable primary energy resources; **SM** = use of secondary material; **RSF** = use of renewable secondary fuels; **NRSF** = use of non-renewable secondary fuels; **NFW** = net use of fresh water

Other environmental information describing waste categories																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NHWD	kg	0,00E+00	0,00E+00	1,17E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RWD	kg	4,62E-02	7,90E-06	6,22E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,25E-05	1,04E-04	2,39E-04	0,00E+00	-3,54E-04

Acronyms: **HWD** = Hazardous waste disposed; **NHWD** = Non-hazardous waste disposed; **RWD** = Radioactive waste disposed

Outputs																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	3,37E-01	0,00E+00	1,17E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,34E+03	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Acronyms: **CRU** = Components for re-use; **MR** = Materials for recycling; **MER** = Materials for energy recovery; **EEE** = Exported electrical energy; **EET** = Exported thermal energy

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Scenario 2:

100% Landfilling of product at end-of-life

Core environmental impact indicators																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-tot	kg CO ₂ eq.	2,34E+02	2,30E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	7,22E+00	-1,77E+01	0,00E+00
GWP-GHG ³	kg CO ₂ eq.	2,34E+02	2,44E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	7,21E+00	-1,77E+01	0,00E+00
GWP-fos	kg CO ₂ eq.	2,34E+02	2,43E+00	1,06E+01	-8,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,68E+00	3,67E+01	7,21E+00	-1,77E+01	0,00E+00
GWP-bio	kg CO ₂ eq.	1,40E-01	-1,40E-01	-2,00E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,00E-02	1,00E-02	0,00E+00
GWP-luc	kg CO ₂ eq.	3,64E-02	1,02E-03	2,88E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,54E-04	1,45E-02	6,72E-04	1,17E-04	0,00E+00
ODP	kg CFC ₁₁ eq.	1,93E-06	3,91E-08	2,18E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,33E-07	5,12E-07	1,75E-07	2,07E-08	0,00E+00
AP	mol H ⁺ eq.	5,92E-01	6,21E-03	7,51E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,83E-02	1,22E-01	4,89E-02	1,22E-02	0,00E+00
EP-fw ¹	kg P eq.	3,76E-03	6,43E-05	3,41E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,27E-05	9,38E-04	0,00E+00	0,00E+00	0,00E+00
EP-mar	kg N eq.	8,28E-02	1,57E-03	2,91E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,63E-02	3,96E-02	1,63E-02	5,66E-03	0,00E+00
EP-ter	mol N eq.	1,94E+00	1,70E-02	3,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,98E-01	4,31E-01	1,69E-01	6,20E-02	0,00E+00
POCP	kg NMVOC _{eq}	5,65E-01	9,39E-03	9,69E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,19E-01	1,70E-01	5,36E-02	1,85E-02	0,00E+00
ADPE ²	kg Sb _{eq}	7,82E-04	7,05E-06	2,67E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,19E-06	1,20E-04	2,59E-05	4,96E-07	0,00E+00
ADPF ²	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	9,90E+01	1,77E+01	0,00E+00
WDP ²	m ³ eq.	1,88E+01	1,76E-01	9,23E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,78E-01	2,31E+00	8,73E-01	4,33E-02	0,00E+00

GWP-GHG = Global Warming Potential GHG; GHG **GWP-total** = Global Warming Potential total; **GWP-fossil** = Global Warming Potential fossil fuels; **GWP-biogenic** = Global Warming Potential biogenic; **GWP-luluc** = Global Warming Potential land use and land use change; **ODP** = Depletion potential of the stratospheric ozone layer; **AP** = Acidification potential, Accumulated Exceedance; **EP-freshwater** = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; **EP-marine** = Eutrophication potential, fraction of nutrients reaching marine end compartment; **EP-terrestrial** = Eutrophication potential, Accumulated Exceedance; **POCP** = Formation potential of tropospheric ozone; **ADP-minerals&metals** = Abiotic depletion potential for non-fossil resources; **ADP-fossil** = Abiotic depletion for fossil resources potential; **WDP** = Water (user) deprivation potential, deprivation-weighted water consumption

¹ Eutrophication aquatic freshwater shall be given in both kg PO₄⁻³ eq and kg P eq.

² The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

³ The indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013).

Use of resources																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	9,56E+01	4,81E-01	7,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-01	6,75E+00	6,06E+00	1,09E-01	0,00E+00
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	9,56E+01	4,81E-01	7,91E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,97E-01	6,75E+00	6,06E+00	1,09E-01	0,00E+00
PENRE	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	9,90E+01	1,77E+01	0,00E+00
PENRM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	1,22E+03	3,66E+01	1,30E+02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,14E+02	5,14E+02	9,90E+01	1,77E+01	0,00E+00
SM	kg	4,99E+01	0,00E+00	4,99E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	1,02E+02	0,00E+00	1,02E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	1,93E+02	0,00E+00	1,93E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NFW	m ³	2,23E+00	5,39E-03	3,69E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,38E-03	6,65E-02	2,31E-02	1,15E-03	0,00E+00

Acronyms: **PERE** = use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM** = use of renewable primary energy resources used as raw materials; **PERT** = total use of renewable primary energy resources; **PENRE** = use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM** = use of non-renewable primary energy resources used as raw materials; **PENRT** = total use of non-renewable primary energy resources; **SM** = use of secondary material; **RSF** = use of renewable secondary fuels; **NRSF** = use of non-renewable secondary fuels; **NFW** = net use of fresh water

Other environmental information describing waste categories																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NHWD	kg	0,00E+00	0,00E+00	1,17E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,34E+03	0,00E+00
RWD	kg	4,62E-02	7,90E-06	6,22E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,25E-05	1,04E-04	2,28E-05	1,94E-06	0,00E+00

Acronyms: **HWD** = Hazardous waste disposed; **NHWD** = Non-hazardous waste disposed; **RWD** = Radioactive waste disposed

Outputs																
Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	3,37E-01	0,00E+00	1,17E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Acronyms: **CRU** = Components for re-use; **MR** = Materials for recycling; **MER** = Materials for energy recovery; **EEE** = Exported electrical energy; **EET** = Exported thermal energy

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Abbreviations

Abbreviation	Definition
CEN	European Committee for Standardization
c-PCR	Complementary Product Category Rules
DAPEEP	Renewable Energy Sources Operator & Guarantees of Origin
EF	Environmental Footprint
ELOT	Hellenic Organization for Standardization
EN	European Norm (Standard)
EPD	Environmental Product Declaration
ERP	Enterprise Resource Planning
ESYD	Hellenic Accreditation System
EURO 4	European Emission Standard Euro 4
GCCA	Global Cement and Concrete Association
GNR	Getting the Numbers Right
GPI	General Programme Instructions
GR	Greece
ISO	International Organization for Standardization
KTS	Concrete Technology Regulation
LCA	Life Cycle Assessment
ND	Not Declared
PCR	Product Category Rules
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals
SAP	Systems, Applications, and Products
SDS	Safety Data Sheet
SVHC	Substances of Very High Concern
UN CPC	United Nations Central Product Classification
CTUe	Comparative Toxic Unit ecotoxicity
CTUh	Comparative Toxic Unit for humans
kBq U235 eq	Kilobecquerel Uranium-235 equivalent
kg	Kilogram
kg C	Kilogram of Carbon
kg CFC 11 eq.	Kilogram CFC-11 equivalent
kg CO2 eq.	Kilogram Carbon Dioxide equivalent
kg N eq.	Kilogram Nitrogen equivalent
kg NMVOC eq.	Kilogram Non-Methane Volatile Organic Compounds equivalent
kg P eq.	Kilogram Phosphorus equivalent
kg Sb eq.	Kilogram Antimony equivalent
km	Kilometer
kWh	Kilowatt-hour
m3	Cubic meter
MJ	Mega Joules
mol H+ eq.	Moles of hydrogen ion equivalents
mol N eq.	Moles of nitrogen equivalents
tn	Tonne

Additional environmental information

Interbeton Building Materials S.A. hereby declares that all ready-mix concrete products are in compliance with the REACH Regulation (EC) No 1907/2006, concerning the Registration, Evaluation, Authorization and Restriction of Chemicals. Concrete does not contain any Substances of Very High Concern (SVHC) currently on the candidate list. REACH SVHC list is not static and is updated frequently, thus the Company will continue to evaluate, research and review to fulfil the demands of the regulation. More information about cement safety handling is available at the Safety Data Sheet (SDS) published at the company's website www.interbeton.gr.

References

GPI v.5.0.1: 2025-02-27 General Programme Instructions of the International EPD® System

PCR 2019:14 v.2.0.1 Product Category rules | Construction products | The International EPD® System

EN 15804:2012+A2:2019/AC:2021 Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products

c-PCR-003 Concrete and concrete elements (EN 16757) Version 2025-04-08

EN 16757:2022 Sustainability of construction works - Environmental product declarations - Product Category Rules for concrete and concrete elements

ISO 21930:2017 (en) Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services

ISO 14020:2000 Environmental labels and declarations - General principles

ISO 14025:2006 Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 14040:2006 Environmental management - Life Cycle Assessment - Principles and framework

ISO 14044:2006 Environmental management - Life Cycle Assessment - Requirements and guidelines

Industry EPD Tool for Cement and Concrete (<https://concrete-epd-tool.org/>)

- User Guide (v5.2, International version, 24 June 2025)
- LCA Model (v5.2, International version, 17 July 2025)
- LCA Database (v5.2, 24 June 2025)

DAPEEP SA: Renewable Energy Sources Operator & Guarantees of Origin | Greece | www.dapeep.gr

ELOT EN 206 EN 206+A1 Concrete – Part 1: Specification, performance, production and conformity

Hellenic Concrete Technology Regulation KTS 2016

Version history

Original version of the EPD (2026-08-26)

Contact information

EPD owner	 A TITAN GROUP COMPANY	22A Halkidos Str. 111 43, Athens, Greece email: main@interbeton.gr • www.interbeton.gr
LCA author		22A Halkidos Str. 111 43, Athens, Greece email: info@titan.gr • www.titan.gr
Programme operator	 THE INTERNATIONAL EPD® SYSTEM	Valhallavägen 81, 114 27 Stockholm, Sweden email: info@environdec.com www.environdec.com
Verifier		Chlois 89, Athina 144 52, Greece email: info@eurocert.gr www.eurocert.gr

Environmental Product Declaration

for Ready Mixed Concrete
C35/45, XA3, S4, Gravel

